

Whatsminer API

V2.0.5



MicroBT Electronics Technology Co.,Ltd

Content

Whatsminer API	1
1. Summary	4
2. Protocol	6
2.1 API ciphertext	7
2.2 The flow	9
3. Writable API	10
3.1 Update pools information	11
3.2 Restart btminer	11
3.3 Power off hashboard	12
3.4 Power on hashboard	12
3.5 Manage led	12
3.6 Switch power mode	13
3.7 Firmware upgrading	14
3.8 Reboot system	15
3.9 Restore to factory setting	15
3.10 Modify the password of admin account	15
3.11 Modify network configuration	16
3.12 Download logs	17
3.13 Set target frequency	17
3.14 Enable btminer fast boot	18
3.15 Disable btminer fast boot	18

3.16 Enable web pools	19
3.17 Disable web pools	19
3.18 Set hostname	19
3.19 Set zone	20
3.20 Load log	20
3.21 Set power percent	20
3.22 Pre power on	21
3.23 Set temp offset	21
3.24 Adjust power limit	22
3.25 Adjust upfreq speed	22
3.26 Set poweroff cool	23
3.27 Set fan zero speed	23
4. Readable API	24
4.1 Summary(Deprecated)	24
4.2 Pools	25
4.3 Edevs/devs(Deprecated)	27
4.4 Devdetails	30
4.5 Get PSU	31
4.6 Get version	32
4.7 Get token	33
4.8 Status	34
4.9 Get miner info	34
4.10 Get error code	35




1. Summary

This article describes how to use the whatminer's API. The intended audience is mine management software developers. The mine management software functions similar to WhatMinerTool can be realized through the API.

The API read permission is granted by default, and the API write permission needs to be enabled through the WhatMinerTool, follow these steps:

1. Change the default password(admin);

2. Enable the API

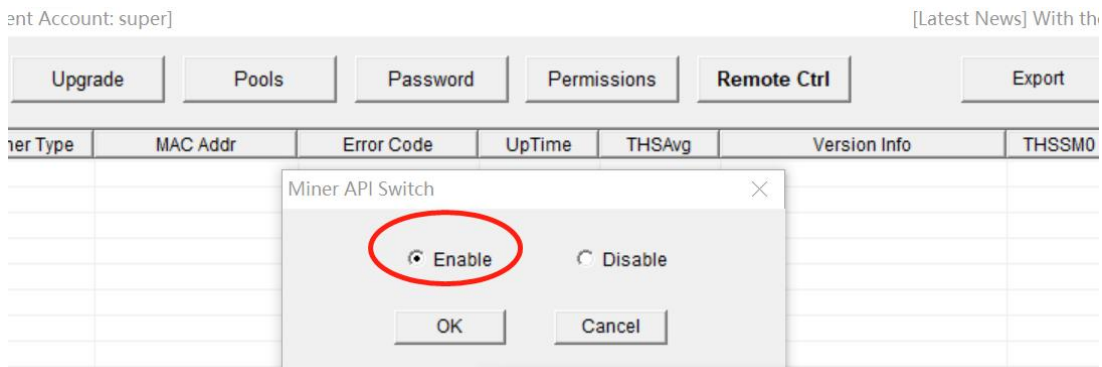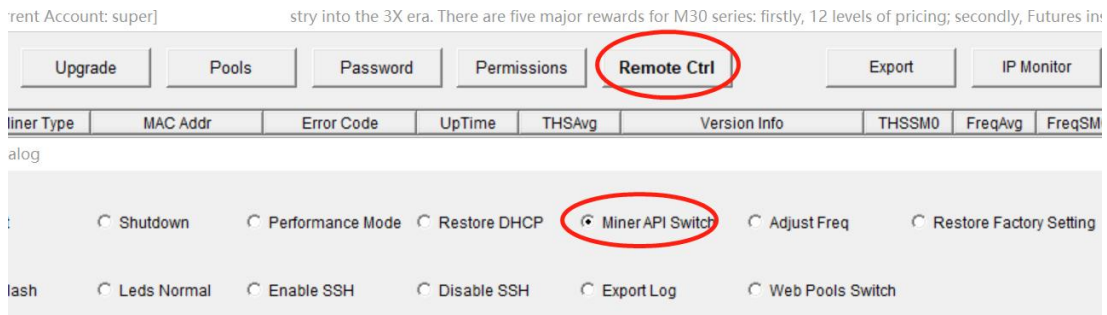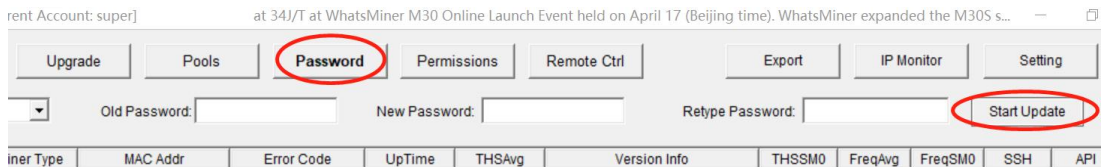

urrent Account: super]

Chip Data	MAC Addr	API	Error Code	Upload...	Version Info
	C2:04:28:00:BE:D6	ON	111-110-200-841...		H3-V8-20200723.22.REL

2. Protocol

The whatsminer API TCP port is 4028.

Notice:

- 1. If no data is received within 10 seconds after the port is connected, the connection will time out and be closed.**
- 2. Miner supports max 16 IP clients, one IP can get 32 tokens, and a token keepalive time is 30 minutes.**

JSON API return format:

```

{
  "STATUS":"string",
  "When":12345678,           #integer
  "Code":133,
  "Msg":"string",          #string or object
  "Description":"string",
}

```

Message Code:

Code	Message
14	invalid API command or data
23	invalid JSON message
45	permission denied
131	command OK
132	command error
134	get token message OK

135	check token error
136	token over max times
137	base64 decode error

2.1 API ciphertext

Notice: the readable API supports two communication modes: plaintext and ciphertext; the writable API supports only ciphertext communication.

Encryption algorithm:

Ciphertext = aes256(plaintext), ECB mode

Encode text = base64(ciphertext)

Steps as follows:

(1)api_cmd = token,\$sign|api_str

(2)enc_str = aes256(api_cmd, \$key)

(3)tran_str = base64(enc_str)

api_str is API command plaintext

Generate aeskey step:

(1)Get token from miner: \$time \$salt \$newsalt

(2)Generate key:

key = md5(salt + admin_password)

Reference code:

```
key = `openssl passwd -1 -salt $salt "${admin_password}"`
```

(3)Generate aeskey:

aeskey = sha256(\$key)

e.g.:

set_led|auto ->

token,\$sign|set_led|auto ->

ase256("token,sign|set_led|auto", \$aeskey) ->


base64(ase256("token,sign|set_led|auto", \$aeskey)) ->

enc|base64(ase256("token,sign|set_led|auto", \$aeskey))

JSON:

```
{  
  "enc":1,      # integer  
  "data":"base64 str"  
}
```


2.2 The flow

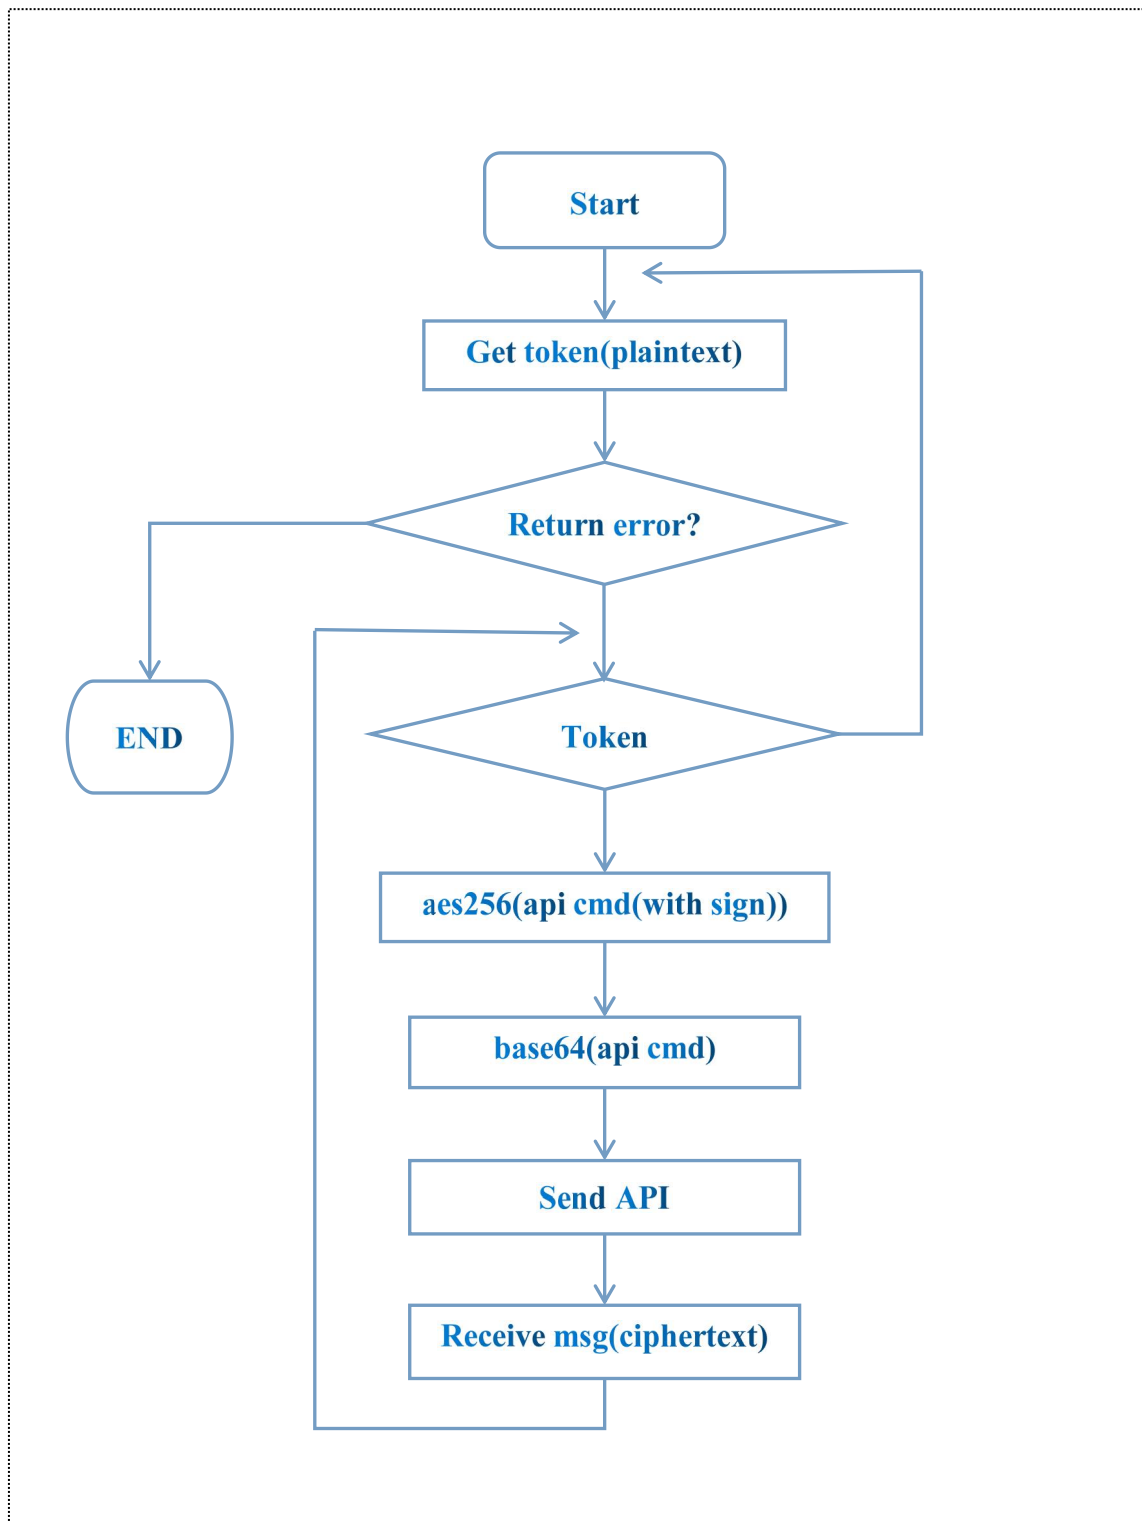

3. Writable API

Writable API only supports ciphertext.

The writable API must first obtain the token as follows:

JSON:

client -> miner:

```
{"cmd":"get_token"}
```

miner -> client:

```
{"time":"str","salt":"str","newsalt":"str"}
```

e.g.:

```
{"time":"5626","salt":"BQ5hoXV9","newsalt":"jbz kfQls"}
```

time: timestamp, this count starts at the Unix Epoch on January 1st, 1970 at UTC.

salt: a random salt is generated for each password

newsalt: new salt for sign

Token calculation method:

Get token from miner: time salt newsalt.

1. calculate key use admin's password and salt.
2. time is the last four characters of time .

key = **md5**(salt + admin_password)

sign = **md5**(newsalt + key + time)

The reference code in Ubuntu:

First, Get those values from miner: \$time \$salt \$newsalt.

Ubuntu Shell command:

```
key=`openssl passwd -1 -salt $salt "${admin_password}"|cut -f 4 -d '$`
```

```
sign=`openssl passwd -1 -salt $newsalt "${key}${time:0-4}"|cut -f 4 -d '$`
```

The default user name and password are admin

3.1 Update pools information

This operation updates the pool configuration and switches immediately.

JSON:

```
{  
  "token":"str",  
  "cmd":"update_pools",  
  "pool1":"str",  
  "worker1":"str",  
  "passwd1":"str",  
  "pool2":"str",  
  "worker2":"str",  
  "passwd2":"str",  
  "pool3":"str",  
  "worker3":"str",  
  "passwd3":"str"  
}
```

3.2 Restart btminer

This operation only restarts the btminer process, not the control board.

JSON:

```
{
```

```
"token": "str",  
"cmd": "restart_btminer"  
}
```

3.3 Power off hashboard

This operation simply stops mining and turns off the power output of the power board.

When respbefore is true, the miner returns the data first and then closes the hashboard, otherwise close the hashboard first and then return the data.

JSON:

```
{  
  "token": "str",  
  "cmd": "power_off",  
  "respbefore": "str"      # str value must be "true" or "false"  
}
```

3.4 Power on hashboard

This operation simply starts mining and turns on the power output of the power board.

JSON:

```
{  
  "token": "str",  
  "cmd": "power_on",  
}
```

3.5 Manage led

Recovery to automatic control:

JSON:

```
{
  "token": "str",
  "cmd": "set_led",
  "param": "auto"    #The LED flashes in auto mode
}
```

LED manual setting:

```
{
  "token": "str",
  "cmd": "set_led",
  "color": "str",    # str must be "red" or "green"
  "period": integer, # flash cycle ms
  "duration": integer, # led on time in cycle(ms)
  "start": integer   # led on time offset in cycle(ms)
}
```

3.6 Switch power mode

After the miner power mode is successfully configured, btminer will be restarted.

JSON:

```
{
  "token": "str",
  "cmd": "set_low_power"
}

{
```

```
"token":"str",
"cmd":"set_high_power"
}

{
"token":"str",
"cmd":"set_normal_power"
}
```

3.7 Firmware upgrading

Upgrade flow:

Client -> miner(text flow): "update_firmware"

JSON:

```
{
"token":"str",
"cmd":"update_firmware"
}
```

Miner -> client(text flow): "ready"

JSON:

```
{
"STATUS":"S",
"When":1594179080,
"Code":131,"Msg":"ready",
"Description":""
}
```



Client -> miner(binary flow): file_size(4Bytes) file_data

file_size: size of upgrade file,send integer to stream as little endian.

file_data:file binary flow

Check upgrading by the value of "Firmware Version" returned by summary.

All interactions are one-time TCP connections.

3.8 Reboot system

This operation restarts the control board.

JSON:

```
{
  "token":"str",
  "cmd":"reboot"
}
```

3.9 Restore to factory setting

This operation restores the network configuration, system passwords, user permission, turns off the api switch, web pools set, removes pools, power mode, power limit, etc.

JSON:

```
{
  "token":"str",
  "cmd":"factory_reset"
}
```

3.10 Modify the password of admin account

The maximum password length is 8 bytes.

Notice: the token must be acquired again from miner for encrypted transmission.

JSON:

```
{
  "token": "str",
  "cmd": "update_pwd",
  "old": "str",           # use letter,number,underline
  "new": "str"           # use letter,number,underline
}
```

3.11 Modify network configuration

Notice: after modifying the configuration, miner will restart.

JSON:

```
{
  "token": "str",
  "cmd": "net_config",
  "param": "dhcp"
}
```

JSON:

```
{
  "token": "str",
  "cmd": "net_config",
  "ip": "str",
  "mask": "str",
  "gate": "str",
  "dns": "str",          # e.g.: "114.114.114.114 192.168.0.1" , divide by space
  "host": "str"
}
```



```
}
```

3.12 Download logs

This operation exports the miner log files.

Download flow:

Client -> miner(text flow):

JSON:

```
{  
  "token":"str",  
  "cmd":"download_logs"  
}
```

Miner -> client(text flow):

JSON:

```
{  
  "STATUS":"S",  
  "When":1603280777,  
  "Code":131,  
  "Msg":{"logfilelen":"str"},  
  "Description":""  
}
```

Miner -> client(binary flow):

The miner sends the file contents after 10ms delay.

3.13 Set target frequency

Notice: **This operation just supports liquid cooling miner or fan cooling down freq.**

After setting, the miner will restart btminer.

JSON:

```
{  
  "cmd": "set_target_freq",  
  "percent": "str",           #range: -100 ~ 100  
  "token": "str"  
}
```

3.14 Enable btminer fast boot

After setting, the next restart of the miner takes effect.

JSON:

```
{  
  "cmd": "enable_btminer_fast_boot",  
  "token": "str"  
}
```

3.15 Disable btminer fast boot

After setting, the next restart of the miner takes effect.

JSON:

```
{  
  "cmd": "disable_btminer_fast_boot",  
  "token": "str"  
}
```

3.16 Enable web pools

Allows configuration of pools on web pages with immediate effect.

JSON:

```
{  
  "cmd": "enable_web_pools",  
  "token": "str"  
}
```

3.17 Disable web pools

Turn off the configure pools feature on the web page with immediate effect.

JSON:

```
{  
  "cmd": "disable_web_pools",  
  "token": "str"  
}
```

3.18 Set hostname

This configuration does not take effect until the network is restarted.

JSON:

```
{  
  "cmd": "set_hostname",  
  "hostname": "str",  
  "token": "str"  
}
```

3.19 Set zone

This configuration does not take effect until the network is restarted.

JSON:

```
{
  "cmd": "set_zone",
  "timezone": "CST-8",
  "zonename": "Asia/Shanghai",
  "token": "str"
}
```

3.20 Load log

Configure the rsyslog log server.

JSON:

```
{
  "cmd": "load_log",
  "ip": "str",
  "port": "str",
  "proto": "str",      #tcp/udp
  "token": "str"
}
```

3.21 Set power percent

Temporarily set the power percent based on the current running power. It is recommended to be used for temporary adjustment. Long run maybe unstable. If you want the machine run for a long time in low power percent, see [2.24 Adjust power limit](#).

JSON:

```
{
  "cmd": "set_power_pct",
  "percent": "str",          #range: 0 ~ 100
  "token": "str"
}
```

3.22 Pre power on

The miner can be preheated by "pre_power_on" before "power on", so that the machine can quickly enter the full power state when "power on" is used. You can also use this command to query the pre power on status. Make sure power_off btminer before pre_power_on.

"wait for adjust temp": The temperature adjustment of the miner is not completed.

"adjust complete": The temperature adjustment of the miner is completed, and miner can be power on.

"adjust continue": Miner is adjusting the temperature while waiting to end.

The value of "complete" is true after the temperature adjustment is complete.

JSON:

```
{
  "cmd": "pre_power_on",
  "complete": "str",        #true/false
  "msg": "str",            #"wait for adjust temp"/"adjust complete"/"adjust continue"
  "token": "str"
}
```

3.23 Set temp offset

Set the offset of miner hash board target temperature.

JSON:

```
{
```

```
"cmd": "set_temp_offset",
"temp_offset": "str",           #range: -30 ~ 0
"token": "str"
}
```

3.24 Adjust power limit

Set the upper limit of the miner's power. Not higher than the ordinary power of the machine. If the Settings take effect, the machine will restart.

JSON:

```
{
  "cmd": "adjust_power_limit",
  "power_limit": "str",         #range: 0 ~ 99999
  "token": "str"
}
```

3.25 Adjust upfreq speed

Set the upfreq speed, 0 is the normal speed, 9 is the fastest speed.

The faster the speed, the greater the final hash rate and power deviation, and the stability may have a certain impact. Fast boot mode cannot be used at the same time.

JSON:

```
{
  "cmd": "adjust_upfreq_speed",
  "upfreq_speed": "str",       #range: 0 ~ 9
  "token": "str"
}
```

3.26 Set poweroff cool

Set whether to cool machine when stopping mining.

JSON:

```
{
  "cmd": "set_poweroff_cool",
  "poweroff_cool": "str",          #type: bool, range: [0,1]
  "token": "str"
}
```

3.27 Set fan zero speed

Sets whether the fan speed supports the lowest 0 speed.

JSON:

```
{
  "cmd": "set_fan_zero_speed",
  "fan_zero_speed": "str",        #type: bool, range: [0,1]
  "token": "str"
}
```

4. Readable API

4.1 Summary(Deprecated)

Contains fan speed, power info, etc.

JSON:

```
{
  "cmd":"summary"
}
```

Return:

```
{
  "STATUS":[{"STATUS":"S","Msg":"Summary"}],
  "SUMMARY":
  [
    {
      "Elapsed":2648,
      "MHS av":84983730.62,           #Average hash rate of miner(MHS)
      "MHS 5s":102423869.64,
      "MHS 1m":86361423.06,
      "MHS 5m":84941366.02,
      "MHS 15m":84969424.09,
      "HS RT":84941366.02,
      "Accepted":804,
      "Rejected":0,
      "Total MH":225043191209.0000,
      "Temperature":80.00,
      "freq_avg":646,
      "Fan Speed In":4530,          #Air outlet fan speed(RPM)
      "Fan Speed Out":4530,       #Air inlet Fan speed(RPM)
      "Power":3593,                #Input power(W)
      "Power Rate":42.31,
    }
  ]
}
```



```

    "Pool Rejected%":0.0000,
    "Pool Stale%":0.0000,
    "Last getwork":0,
    "Uptime":20507,                #System up time(second)
    "Security Mode":0,
    "Hash Stable":true,
    "Hash Stable Cost Seconds":17569,
    "Hash Deviation%":0.1398,
    "Target Freq":574,
    "Target MHS":76157172,
    "Env Temp":32.00,
    "Power Mode":"Normal",        #Power mode (Low/Normal/High)
    "Factory GHS":84773,          #Factory hash rate(GHS)
    "Power Limit":3600,
    "Chip Temp Min":75.17,
    "Chip Temp Max":101.25,
    "Chip Temp Avg":89.60,
    "Debug":"-0.0_100.0_354",
    "Btminer Fast Boot":"disable"
  }
]
}

```

4.2 Pools

Contains pool miner information.

JSON:

```

{
  "cmd":"pools"
}

```

Return:

```
{
  "STATUS": [{"STATUS": "S", "Msg": "1 Pool(s)"}],
  "POOLS":
  [
    {
      "POOL": 1,
      "URL": "stratum+tcp://btc.ss.poolin.com:443", #Pool address and port
      "Status": "Alive", #Pool status
      "Priority": 0, #Pool priority(0 highest)
      "Quota": 1, #Pool default strategy is 1
      "Long Poll": "N",
      "Getworks": 1,
      "Accepted": 0, #Accepted nonces by the pool
      "Rejected": 0, #Rejected nonces by the pool
      "Works": 0,
      "Discarded": 0,
      "Stale": 0,
      "Get Failures": 0,
      "Remote Failures": 0,
      "User": "microbtinitial", #Miner name
      "Last Share Time": 0, #Last nonce submission time
      "Diff1 Shares": 0,
      "Proxy Type": "",
      "Proxy": "",
      "Difficulty Accepted": 0.00000000,
      "Difficulty Rejected": 0.00000000,
      "Difficulty Stale": 0.00000000,
      "Last Share Difficulty": 0.00000000,
      "Work Difficulty": 0.00000000,
      "Has Stratum": 1,
      "Stratum Active": true, #Pool stratum status
      "Stratum URL": "btc-vip-3dcoa7jxu.ss.poolin.com", #Pool address
    }
  ]
}
```

```

    "Stratum Difficulty":65536.00000000,           #Pool difficulty
    "Best Share":0,
    "Pool Rejected%":0.0000,                       #Pool rejection percent
    "Pool Stale%":0.0000,
    "Bad Work":0,
    "Current Block Height":0,                       #Current Block Height
    "Current Block Version":536870916             #Current Block Version
  }
]
}

```

4.3 Edevs/devs(Deprecated)

Contains information for each hash board.

JSON:

```

{
  "cmd":"edevs"
}

```

Return:

```

{
  "STATUS":[{"STATUS":"S","Msg":"3 ASC(s)"}],
  "DEVS":
  [
    {
      "ASC":0,
      "Slot":0,                                     #Hash board slot number
      "Enabled":"Y",
      "Status":"Alive",
      "Temperature":80.00,                          #Board temperature at air outlet (°C)
    }
  ]
}

```

```

"Chip Frequency":587,           #Average frequency of chips in hash board
(MHz)
"MHS av":10342284.80,         #Average hash rate of hash board (MHS)
"MHS 5s":5298845.66,
"MHS 1m":8508905.30,
"MHS 5m":10351110.56,
"MHS 15m":10296867.74,
"HS RT":10351110.56,
"HS Factory":28836,          #Factory marking(GHS)
"Accepted":18,
"Rejected":0,
"Last Valid Work":1643183296,
"Upfreq Complete":0,
"Effective Chips":156,
"PCB SN":"HEM1EP9C400929K60003", #PCB serial number
"Chip Data":"K88Z347-2039   BINV01-195001D",
"Chip Temp Min":80.56,
"Chip Temp Max":97.00,
"Chip Temp Avg":89.89,
"chip_vol_diff":9
},
{
"ASC":1,
"Slot":1,
"Enabled":"Y",
"Status":"Alive",
"Temperature":80.00,
"Chip Frequency":590,
"MHS av":10259948.84,
"MHS 5s":5413853.90,
"MHS 1m":8577249.68,
"MHS 5m":10441143.92,
"MHS 15m":10214893.36,

```

```
"HS RT":10441143.92,  
"Accepted":16,  
"Rejected":0,  
"Last Valid Work":1643183291,  
"Upfreq Complete":0,  
"Effective Chips":156,  
"PCB SN":"HEM1EP9C400929K60001",  
"Chip Data":"K88Z347-2039   BINV01-195001D",  
"Chip Temp Min":77.94,  
"Chip Temp Max":96.50,  
"Chip Temp Avg":88.23,  
"chip_vol_diff":9  
},  
{  
"ASC":2,  
"Slot":2,  
"Enabled":"Y",  
"Status":"Alive",  
"Temperature":80.00,  
"Chip Frequency":590,  
"MHS av":10258829.89,  
"MHS 5s":5571781.71,  
"MHS 1m":8675316.17,  
"MHS 5m":10479953.41,  
"MHS 15m":10213779.32,  
"HS RT":10479953.41,  
"Accepted":19,  
"Rejected":0,  
"Last Valid Work":1643183296,  
"Upfreq Complete":0,  
"Effective Chips":156,  
"PCB SN":"HEM1EP9C400929K60002",  
"Chip Data":"K88Z347-2039   BINV01-195001D",
```

```
"Chip Temp Min":80.50,  
"Chip Temp Max":97.44,  
"Chip Temp Avg":90.91,  
"chip_vol_diff":9  
}  
]  
}
```

4.4 Devdetails

JSON:

```
{  
  "cmd":"devdetails"  
}
```

Return:

```
{  
  "STATUS":  
  [  
    {  
      "STATUS":"S",  
      "When":1643181852,  
      "Code":69,  
      "Msg":"Device Details",  
      "Description":"btminer"  
    }  
  ],  
  "DEVDETAILS": #Hashboard detail  
  [  
    {
```

```
"DEVDETAILS":0,  
  "Name":"SM",  
  "ID":0,  
  "Driver":"bitmicro",  
  "Kernel": "",  
  "Model":"M30S+VE40"  
},  
{  
  "DEVDETAILS":1,  
  "Name":"SM",  
  "ID":1,  
  "Driver":"bitmicro",  
  "Kernel": "",  
  "Model":"M30S+VE40"  
},  
{  
  "DEVDETAILS":2,  
  "Name":"SM",  
  "ID":2,  
  "Driver":"bitmicro",  
  "Kernel": "",  
  "Model":"M30S+VE40"  
}  
]  
}
```

4.5 Get PSU

Contains power information.

JSON:

```
{
```

```
"cmd": "get_psu"  
}
```

Return:

```
{  
  "STATUS": "S",  
  "When": 1643182793,  
  "Code": 131,  
  "Msg":  
  {  
    "name": "P221B",  
    "hw_version": "V01.00",  
    "sw_version": "V01.00.V01.03",  
    "model": "P221B",  
    "iin": "8718", #Current in  
    "vin": "22400", #Voltage in  
    "fan_speed": "6976", #Power fan speed  
    "version": "-1",  
    "serial_no": "A1232B0120100049",  
    "vender": "7"  
  },  
  "Description": ""  
}
```

4.6 Get version

Get miner API version.

JSON:

```
{  
  "cmd": "get_version"
```



```
}
```

Return:

```
{
  "STATUS":"S",
  "When":1643187652,
  "Code":131,
  "Msg":
  {
    "api_ver":"2.0.3",
    "fw_ver":"20220125.13.Rel",
    "platform":"H6OS",
    "chip":"K88Z001-2039   BINV01-195001B"
  },
  "Description":""
}
```

4.7 Get token

Plaintext must be used, and the miner returns plaintext.

JSON:

```
{
  "cmd":"get_token"
}
```

Return:

```
{
  "STATUS":"string",
  "When":12345678,
  "Code":133,
```

```
"Msg":  
{  
  "time":"str",  
  "salt":"str",  
  "newsalt":"str"  
},  
"Description":""  
}
```

4.8 Status

Get btminer status and firmware version.

JSON:

```
{  
  "cmd":"status"  
}
```

Return:

```
{  
  "btmineroff":"str",           #"true"/"false"  
  "Firmware Version":"str"  
}
```

4.9 Get miner info

JSON:

```
{  
  "cmd":"get_miner_info",
```

```
"info": "ip,proto,netmask,gateway,dns,hostname,mac,ledstat,gateway"  
}
```

You can select the fields in "info" that you want to return.

Return:

```
{  
  "STATUS": "S",  
  "When": 1618212903,  
  "Code": 131,  
  "Msg":  
  {  
    "ip": "192.168.2.16",  
    "proto": "dhcp",  
    "netmask": "255.255.255.0",  
    "dns": "114.114.114.114",  
    "mac": "C6:07:20:00:1E:C2",  
    "ledstat": "auto",  
    "gateway": "192.168.2.1"  
  },  
  "Description": ""  
}
```

4.10 Get error code

You can use this command to obtain the machine error codes.

JSON:

```
{  
  "cmd": "get_error_code",  
}
```

Return:

```
{
  "STATUS":"S",
  "When":1642392343,
  "Code":131,
  "Msg":{"error_code":["329":"2022-01-17 11:28:11"]},
  "Description":""
}
```

The API command can be used for two joins.

e.g.

```
{
  "cmd":"summary+pools"
}
```